


## 1880 Driveshaft / Engine Dynamometer


### Specifications

- Continuous load rating 5,000 lb-ft (6,779 Nm) with no angular misalignment and  $2^\circ \pm 1^\circ$  slope (parallel offset between 0.5 and 1.5 in. (13 and 40 mm))
- Maximum Recommended Short Duration Load 8,900 lb-ft (12,000 Nm) with no angular misalignment and  $2^\circ \pm 1^\circ$  slope (parallel offset between 0.5 and 1.5 in. (13 and 40 mm))
- Minimum Elastic Limit 16,000 lb-ft (21,690 Nm) represents the maximum torque load the universal joint will transmit instantaneously without brinelling bearings or yield in any part
- Maximum Allowable Speed 4,000 rpm
- Dynamically-balanced
- Weight 150 lb (68 kg)

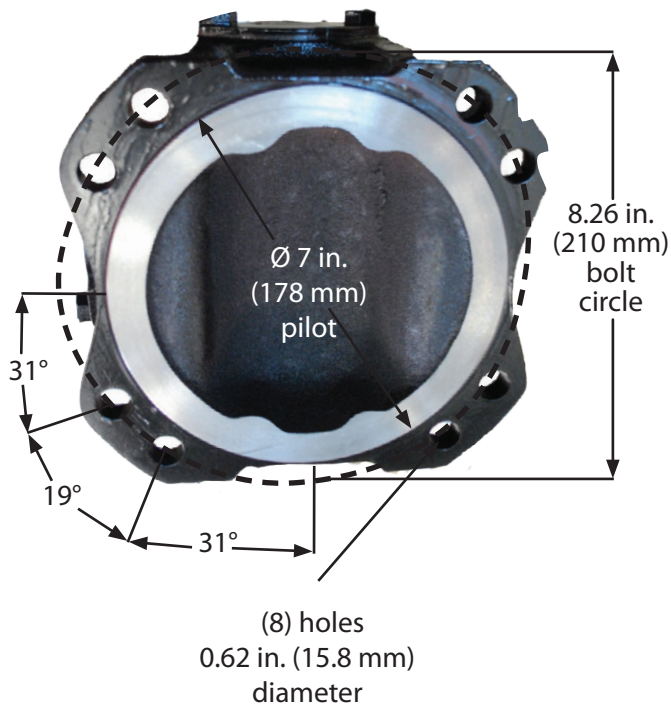

27.44 in. (697 mm)  
minimum collapsed

30.94 in. (786 mm)  
maximum extended

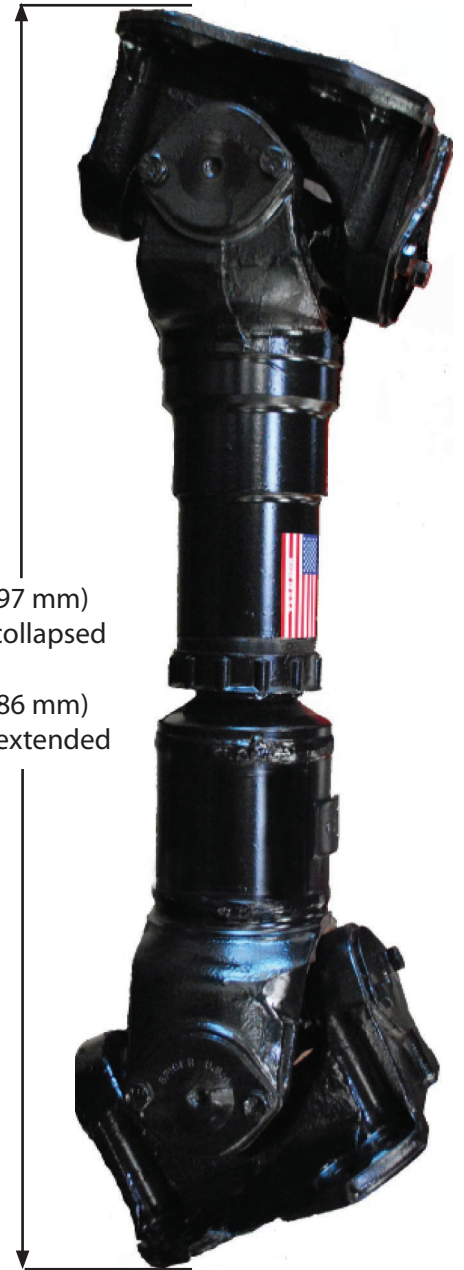

*Everything you need to succeed*